


SERIE

# CARTACROM LIQUIDI



# SERIE CARTACROM LIQ.

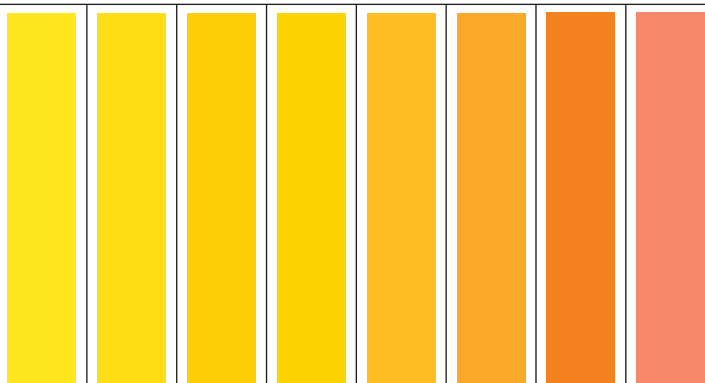

YELLOW 2G liq.

YELLOW 3G liq.

YELLOW B5N liq.

YELLOW BLN liq.

YELLOW GV liq.

YELLOW GR liq.

ORANGE 3GLT liq.

ORANGE 2RT liq.

IONIC CHARGE

a

a

a

a

a

a

a

a

FASTNESS

LIGHT

3-4

3

4

4

1-2

1-2

4/4-5

2

ACID

4-5

4-5

5

5

5

5

5

5

ALKALI

2-3

4

4

4-5

3

3

5

3-4

ALCOOL

2

2

3-4

3-4

3-4

3-4

2

4

WATER

3

3-4

4-5

5

5

5

5

5

BACKWATER

3

3-4

4

4

4

3-4

4/4-5

4

BLEACHABILITY

REDUCTIVE

5

3-4

4-5

5

2-3

2-3

4-5

5

OXIDATIVE

3

3-4

1













1-2

1

1

1-2

2

												
<b>RED GTN liq.</b>	<b>DEEP RED B liq.</b>	<b>RED 3B liq.</b>	<b>RED 8B liq.</b>	<b>VIOLET 2B liq.</b>	<b>TURQUOISE FBL liq.</b>	<b>TURQUOISE LNG liq.</b>	<b>BLUE 2G liq.</b>	<b>BLUE TG liq.</b>	<b>BLUE TRG liq.</b>	<b>BROWN TT liq.</b>	<b>BLACK GTR liq.</b>	<b>BLACK N liq.</b>
a	a	a	a	a	a	a	a	a	a	a	a	a
1-2	2	2	1	2-3	4	4	4	2	1	2	2-3	2-3
5	4-5	5	3	5	5	3	5	5	3	5	4-5	4-5
4-5	3	4	1-2	4-5	5	5	4-5	2-3	2	4-5	4-5	5
4-5	2	3	1	3	5	5	4-5	4	2	2	5	5
5	4	4-5	2	5	5	5	5	5	2	4-5	5	5
4	3	2/2-3	2/2-3	2-3	4	3/3-4	3/3-4	2-3/3	1-2	3/3-4	3-4/4	3-4/4
4-5	5	5	4-5	5	4	3-4	5	5	5	3-4	5	3
1	1-2	3	2	1-2	4	3-4	3	4	4	4	2	2

**Cartacrom liq. dyes** are selected direct anionic dyes in liquid form suitable for application in fine paper and tissue.

### Illustrations

Illustrations represent the shade of **Cartacrom liq. dyes** at an approximate depth of shade of 2,0% dye on dry furnish.

### Fastnesses

In reference of listed value of fastnesses, they all are obtained at 2,0% dyeing depth.

**Light fastnesses** were estimated using a Xenon arc lamp. Results are evaluated according to the Blue wool scale, where value 8 represents maximum fastness, value 1 minimum one.

**Bleed fastnesses** are tested in following solutions:

- Acid 15 g/l acetic acid
- Alkali 5 g/l sodium carbonate
- Alcool 50%
- Distilled water

Procedure as follows: 2 sheets of Whatman filter paper are wetted with the examined solution, then a sample of paper is placed in between and pressed with a weight of 200 grs at room temperature for 10 minutes.

Then Whatman filter papers are compared with a 1-5 Grey scale. Value 5 represents no coloration, value 1 heavy coloration.

**Backwater** is collected during the formation of the paper sheet, then value is established with 1-5 Grey Scale. Value 5 represents no coloration, value 1 heavy coloration of backwater.

**Bleachabilities.** Paper samples are bleached with following method:

Method	Reductive	Oxidative
Agent	2% active sodium dithionite (sodium hydrosulphite)	2% active chlorine (calcium Hypochlorite)
PH	6	4
Temperature	6°C	50°C
Time	60 minutes	60 minutes

From the obtained bleached pulp handsheets are produced and then evaluated in terms of residual color strength. To the minimum residual color strength the highest value (5) is assessed, while the minimum (1) is addressed to the highest residual color strength.

All informations are based on the current state of our knowledge and on the results of our tests, but they are given without guarantee. The Buyer remains responsible for verifying that the products are suitable for his intended process or purpose. Tests before the industrial use of the product are recommended.

If stored at temperature between 5°C and 40°C in their original packaging and tightly sealed, the shelf life of **Cartacrom liq. Dyes** have to be considered of at least 9 months. Anyway products must be protected from frost and as much as possible from high temperature.

Each time dye is taken out for application, containers must be tightly released, and the remaining content must be used as soon as possible. Although no chemical is entirely free from hazard, these products will present a low risk to health provided that good standards of industrial hygiene are observed.

All informations contained in this presentation are based on the current state of our knowledge and on the results of our tests, but they are given without guarantee. The Buyer remains responsible for verifying that the products are suitable for his intended process or purpose. Tests before the industrial use of the product are recommended.



COLORANTI, PIGMENTI E PRODOTTI CHIMICI PER L'INDUSTRIA  
INDUSTRIAL DYES, PIGMENTS AND CHEMICAL PRODUCTS

**Cromatos s.r.l.**

Via E. Barsanti, 28 | 47122 Forlì (FC) Italy | T +39 0543 796191 | F +39 0543 796189  
info@cromatos.com | www.cromatos.com